

A BREATH
OF FRESH AIR

VENTILATION PRODUCTS

CoolRidge® | Xtractor Vent® XLP Turbo | Roll Vent® | Rapid Ridge® | QuickVent®



COOLRIDGE® ***

SECTIONAL RIDGE VENT WITH EXTERNAL BAFFLES

- Injection-molded polypropylene in 4-foot sections.
- Integrated end plugs every 12".
- Internal supports in nail line area.
- Nails included.
- Embossed nail line and 1/2" nail zone area with clear space underneath.
- Exterior baffles and internal "sinewave"-shaped baffles.
- Available with an internal filter option.
- Male/female connection between pieces.
- Drain holes every 4" in exterior baffle.
- **Must be used with an equal or greater amount of soffit ventilation.**
- Florida Building Code approved.



PRODUCT DATA**

Width	14.75" (0.375 meters)
Length	48" (1.22 meters)
Thickness	13/16" (2.06 centimeters)
Weight without filter	33.6 lbs. per carton (15.24 kg)
Weight with filter	34 lbs. per carton (15.42 kg)
Color	Black
12 pieces per bundle	48' per bundle
12 bundles per skid	576' per skid
Net free area per linear foot	18 square inches (116.1 square centimeters)

** All values subject to manufacturing variation.

*** U.S. Patent #6,277,024.

† U.S. Patents #5,960,595; #6,298,613; #6,981,916.
Canadian Patent #2,300,803.

†† U.S. Patents #6,981,916; #6,298,613; #5,960,595.
Canadian Patents #2,300,803; #4,942,699.

VENTILATION PRODUCTS BEGIN TO AGE AS SOON AS THEY ARE EXPOSED TO NATURE. BUILDINGS EXPERIENCE AGING FACTORS DIFFERENTLY, SO IT IS DIFFICULT TO PREDICT HOW LONG VENTILATION PRODUCTS WILL LAST. THAT'S WHY TAMKO PROVIDES A LIMITED WARRANTY THAT INCLUDES A BINDING ARBITRATION CLAUSE AND OTHER TERMS AND CONDITIONS WHICH ARE INCORPORATED HEREIN BY REFERENCE. YOU MAY OBTAIN A COPY OF THE LIMITED WARRANTY AT TAMKO.COM OR BY CALLING 1-800-641-4691.

XTRACTOR VENT® XLP TURBO

NAIL GUN-ABLE CONTINUOUS RIDGE VENT WITH EXTERNAL BAFFLES

- Rolled ridge vent.
- Internal supports in nail line area.
- Nail gun-able installation with embossed nail line (1¾" coil nails included).
- Exterior baffles and internal "sinewave" -shaped baffles.
- Male/female connection between pieces.
- Vent holes are only 1/8" wide.
- Drain holes every 1/2" in exterior baffle.
- **Must be used with an equal or greater amount of soffit ventilation.**
- Minimum 3/12" roof pitch (up to 16/12").
- Use with standard 12" (0.3 meter) wide cap shingles.
- Florida Building Code approved.

PRODUCT DATA**	
Width	14" (0.36 meters)
Length	25' roll (7.62 meters)
Thickness	5/8" (1.59 centimeters)
Weight	14.5 lbs. per carton (6.58 kg)
Color	Black
1 roll per carton =	25' per carton
18 cartons per skid =	450' per skid
Net free area per linear foot	12.75 square inches (82.26 square centimeters)

ROLL VENT®⁺

CONTINUOUS RIDGE VENT

- See-through hinge for centering over the ridge.
- Innovative design used for shingle-over ventilation.
- Nylon 6 plus carbon black with nonwoven nylon-polyester.
- 2½" nails and nail line provided.
- Lightweight, easy-to-cut material.
- Compression-resistant design creates a stiffer nailing area and smooth finish.
- Requires no special tools, baffles, metal connectors, end caps or special filters.
- Breathable
- **Must be used with an equal or greater amount of soffit ventilation.**

PRODUCT DATA**	20'	50'
Width	10½" (0.267 meters)	10½" (0.267 meters)
Length	20' (6.1 meters)	50' (15.24 meters)
Thickness	15/16" (2.38 centimeters)	
Weight	5.0 lbs. (2.27 kg)	13.0 lbs. (5.90 kg)
10½" x 20'	5 rolls per bag 8 bags per skid	= 100' per bag = 800' per skid
10½" x 50'	2 rolls per bag 12 bags per skid	= 100' per bag = 1,200' per skid
Net free area per linear foot	18 square inches (116.1 square centimeters)	



RAPID RIDGE® ++

NAIL GUN-ABLE CONTINUOUS RIDGE VENT

- Installs with pneumatic roofing nail gun.
- See-through hinge for centering over the ridge.
- Innovative design used for roof ventilation.
- Nylon 6 plus carbon black for UV resistance with nonwoven nylon-polyester.
- Lightweight, easy-to-cut material.
- Compression-resistant design creates a stiffer nailing area and smooth finish.
- 1¾" collated nails and nail line provided for installation.
- Requires no baffles, metal connectors, end caps or special filters.
- **Must be used with an equal or greater amount of soffit ventilation.**

PRODUCT DATA**	20'	50'
Width	10½" (0.267 meters)	10½" (0.267 meters)
Length	20' (6.1 meters)	50' (15.24 meters)
Thickness	5/8" (1.59 centimeters)	
Weight	4.8 lbs. (2.18 kg)	12.5 lbs. (5.67 kg)
10½" x 20'	5 rolls per bag 8 bags per skid	= 100' per bag = 800' per skid
10½" x 50'	2 rolls per bag 12 bags per skid	= 100' per bag = 1,200' per skid
Net free area per linear foot	12.5 square inches (80.64 square centimeters)	

QUICKVENT™

CONTINUOUS RIDGE VENT

- Installs with pneumatic roofing nail gun.
- See-through hinge for centering over the ridge.
- Innovative design used for ventilation.
- Classic style ridge vent made from nylon matrix technology.
- Lightweight, easy-to-cut material.
- Compression-resistant design creates a stiffer nailing area and smooth finish.
- 1¾" collated nails for installation.
- Requires no baffles, metal connectors, end caps or special filters.
- **Must be used with an equal or greater amount of soffit ventilation.**

PRODUCT DATA**	20'	50'
Width	10½" (0.267 meters)	10½" (0.267 meters)
Length	20' (6.1 meters)	50' (15.24 meters)
Thickness	3/5" (1.52 centimeters)	
Weight	4.7 lbs. (2.1 kg)	7.5 lbs. (3.4 kg)
10½" x 20'	36 rolls per skid	= 720' per skid
10½" x 50'	16 rolls per skid	= 800' per skid
Net free area per linear foot	13.5 square inches (80.64 square centimeters)	




VENTILATION WITH CLEAN SIGHTLINES.

TAMKO® offers several ridge ventilation products. Unlike some other ventilation options, TAMKO products accent the ridge and eliminate unsightly vent caps to enhance visual curb appeal.

THE IMPORTANCE OF PROPER VENTILATION.

Underventilated attic space can lead to higher utility bills and the accelerated aging of shingles. That's why proper roof ventilation is critical. A combination of properly installed and maintained continuous eaves and ridge vents help promote draft ventilation from the bottom to the top of the attic space.

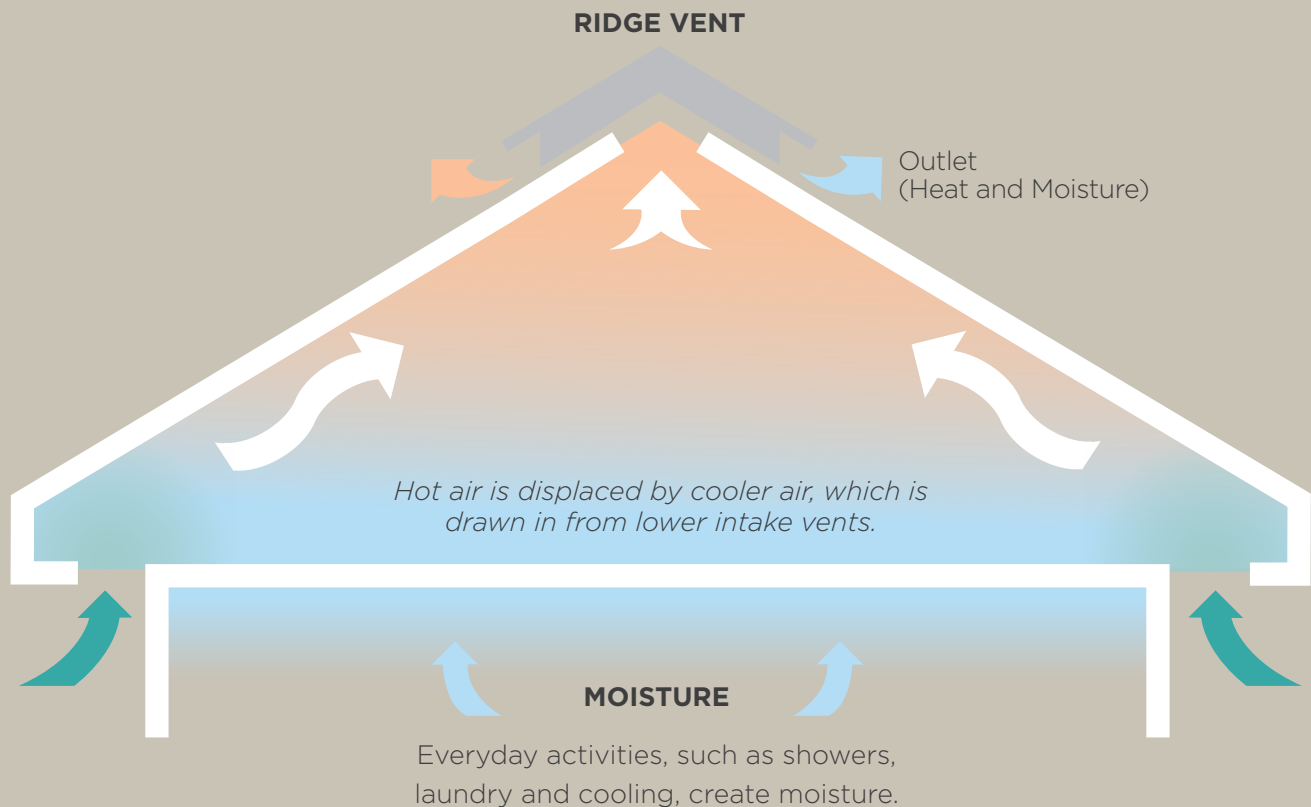

Note: TAMKO products must be applied in accordance with the directions listed in this brochure and on the product wrapper. If conditions require special fastening methods, obtain written recommendations from TAMKO.

TAMKO®
BUILDING PRODUCTS
tamko.com



BUILDING PRODUCTS FOR THE PROFESSIONAL

Since 1944, building professionals and homeowners have looked to TAMKO® for building products. Today, we offer a wide range of building products, including Heritage® Laminated Asphalt Shingles, Elite Glass-Seal® 3-tab Shingles, MetalWorks® steel shingles, waterproofing materials, ventilation products, Envision® Composite Lumber, EverGrain® Composite Lumber, Marquee Railing® and Tam-Rail® Railing Systems.



P.O. Box 1404
Joplin, MO 64802-1404
1-800-641-4691
tamko.com

Information included in this brochure was current at the time of printing. To obtain a copy of the most current version of this brochure, visit us online at tamko.com or call us at 1-800-641-4691.

TAMKO, CoolRidge, Moisture Guard, Heritage, MetalWorks, Elite Glass Seal, EverGrain, Envision, Marquee Railing and Tam-Rail are registered trademarks and QuickVent is a trademark of TAMKO Building Products, Inc. Roll Vent, Rapid Ridge and Xtractor Vent are trademarks of Benjamin Obdyke Incorporated.

©2017 TAMKO Building Products, Inc.